

# 771S

Spring Loaded Stainless Steel Check Valve



Via Circonvallazione, 10  
13018 Valduggia (VC), Italy  
Tel: +39 0163 47891  
Fax: +39 0163 47895  
www.vironline.com



Spring loaded stainless steel check valve  
Wafer type, suitable for EN1092 PN10, PN16 or PN40 flanges  
To be installed horizontally or vertically  
Minimum opening pressure 0,1bar

## PN40

For DN≤50: max 40bar up to 85°C, max 16bar above  
For DN≥65: max 40bar up to 85°C, max 10bar above  
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)


## Working conditions

- Suitable for: water, -20°C to +180°C  
below 0°C only for water with added antifreeze fluids
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/EU)



## PARTLIST

N.	Part	Material	Norm
1	Body	Stainless steel	SS316
2	Disc	Stainless steel	SS316
3	Spring	Stainless steel	SS316
4	Disc guide	Stainless steel	SS316

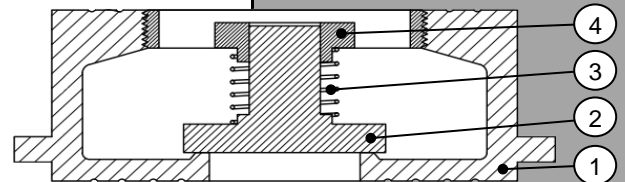

## DIMENSIONS

DN	ØA [mm]	ØB [mm]	ØD [mm]	L [mm]	Weight [kg]
015	49	49	16	30	220
020	50	54	17	30	230
025	67	68	21	30	420
032	76	80	29	35	606
040	87	90	38	35	755
050	100	105	48	40	1.110
065	118	124	62	53	1.705
080	138	140	77	58	2.500
100	155	159	95	63	2.815
125	177	183	115	78	4.530
150	202	209	135	95	6.835
200	260	270	180	105	11.840

