

92HS

Connection Flexible Hoses



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



Flexible hose

Threaded connection M ISO 7/1 R and F with swivel nut ISO 228/1

EPDM hoses with stainless steel braided sleeve

DZR brass fitting with EPDM perox gasket

Length of 12" (300mm) and 24" (600mm)


PN25 for DN≤25

PN16 for DN≥32

Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

Working conditions

- Suitable for: water, -5°C to +90°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/UE)

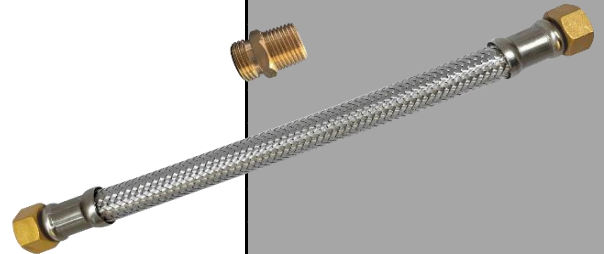


PARTLIST

N.	Part	Material	Norm
1	Nut	Brass	CW614N
2	Gasket	EPDM Perox	-
3	Sleeve	Stainless steel	AISI 304
4	Hose	EPDM	-
5	Braided hose	Stainless steel	AISI 304
6	Fitting M	DZR Brass	CW602N

DIMENSIONS

DN	T	L [mm]	ØDI [mm]	ØDE [mm]	P [mm]	Bending Radius [mm]	Weight ¹ [g]
015	½"	300/600	13	19	10	90	250/401
020	¾"	300/600	19	27	15	90	440/685
025	1"	300/600	25	34	20	110	700/1135
032	1¼"	300/600	32	42	26	130	1167/1957
040	1½"	300/600	40	52	32	150	1577/2611
050	2"	300/600	50	62	41	180	2332/3802

¹Weight for version 300mm/600mm length

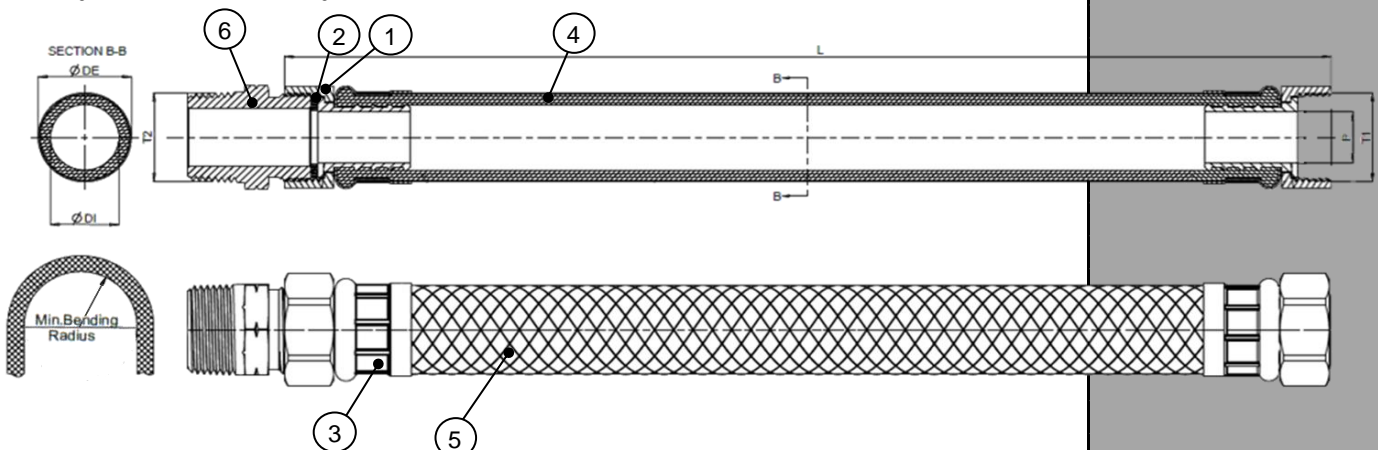

230703