

765

Spring-loaded Brass Check Valve



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com



Spring-loaded brass check valve
Threaded F/F (ISO 228/1)
Optional stainless steel strainer (mesh 1000µm)
To be installed horizontally or vertically
Minimum opening pressure 0,03bar
TR CU 010 compliant

PN16 (PN10 for DN≥65)
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)

Working conditions



- Suitable for: water, 0°C to +100°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/UE)



EAC



PARTLIST

N.	Part	Material	Norm
1	Body	Brass	EN12165 CW617N
2	Spring	Stainless steel	AISI 302
3	Disc	Brass	EN12165 CW617N
4	Seal holder	Stainless steel	AISI 304
5	Seal	NBR	-
6	Fixed end	Brass	EN12165 CW617N
7	Threaded end	Polyamide	-
8	Strainer	Stainless steel	AISI 304



DIMENSIONS

DN	G	D [mm]	LA [mm]	H	E [mm]	LB [mm]	Val. wgt [g]	Str. wgt [g]
015	½"	35	59	½"	28	50	185	7
020	¾"	42	65	¾"	33	56	265	11
025	1"	48	75	1"	41	58	420	20
032	1¼"	61	83	1¼"	50	69	650	25
040	1½"	71	93	1½"	55	78	870	35
050	2"	87	101	2"	67	96	1325	45
065	2½"	104	104	2½"	86	98	2635	75
080	3"	125	113	3"	100	112	4200	125
100	4"	155	132	4"	128	131	6265	175

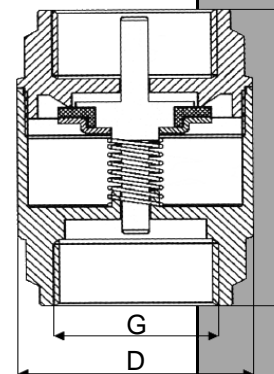

170217