



Double sphere threaded rubber flexible joint  
Threaded F/F union ends (ISO 228/1)  
Polyamide wired reinforced body  
Metallic parts in zinc plated cast iron  
TR CU 010 compliant

PN16

Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)


Working conditions

- Suitable for: water, -10°C to +100°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/UE)



## PARTLIST

N.	Part	Material	Norm
1	Body	EPDM + polyamide	-
2	Ring nut	Zinc pl. cast iron	-
3	Union	Zinc pl. cast iron	-
4	Union nut	Zinc pl. cast iron	-

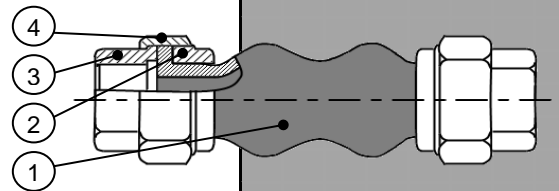

## DIMENSIONS

DN	G	L [mm]	Allowable mov. <sup>1</sup> [mm]	Deflection [°]	Weight [kg]
020	3/4"	200	22 / 5 / 22	30°	0,70
025	1"	200	22 / 6 / 22	25°	1,00
032	1 1/4"	200	22 / 6 / 22	25°	1,30
040	1 1/2"	200	22 / 6 / 22	20°	1,90
050	2"	200	22 / 6 / 22	15°	2,60
065	2 1/2"	265	22 / 6 / 22	12°	3,70
080	3"	285	22 / 6 / 22	10°	5,40

<sup>1</sup>Compression / extension / lateral extension

